





LED RECESSED DOWNLIGHT SERIES

TECHNICAL SPECIFICATIONS

| | |
|---------------------|--|
| CCT | 4000K; (2500K/3000K/5000K on request) |
| CRI | >80Ra |
| INPUT VOLTAGE | AC200-250V |
| PF | ≥0.94 |
| POWER FREQUENCY | 50/60Hz |
| LIFETIME | L70 > 50,000 hrs. |
| WORKING TEMPERATURE | -20°C to +40°C |
| IP GRADE | IP22 |
| LED DRIVER | External driver plug and play, dimmable 1-10V |
| LED LIGHT SOURCE |  |
| THERMAL MANAGEMENT | Passive |
| SURFACE FINISH | White |
| MOUNTING | Recessed |
| EMERGENCY OPTION | 3 hr. available |




| Code | Power Consumption | CCT | Luminous Flux | Beam angle | Dimension of cut-outs | Exterior dimensions |
|-----------------|-------------------|--------|---------------|------------|-----------------------|---------------------|
| VER-D125-6-840 | 6W | 4,000K | 610 lm | 100° | Ø125-145mm | Ø155x54mm |
| VER-D165-12-840 | 12W | 4,000K | 1,100 lm | 100° | Ø165-185mm | Ø195x54mm |
| VER-D205-20-840 | 20W | 4,000K | 2,000 lm | 100° | Ø205-230mm | Ø245x54mm |



VERDE LED HQ


VERDE House,
Wellington Road
Cork,
Ireland

T. + 353 - 21 - 486 - 1577
F. + 353 - 21 - 486 - 1572
E. info@verdeled.com




Dimensions (mm)


VER-D205:

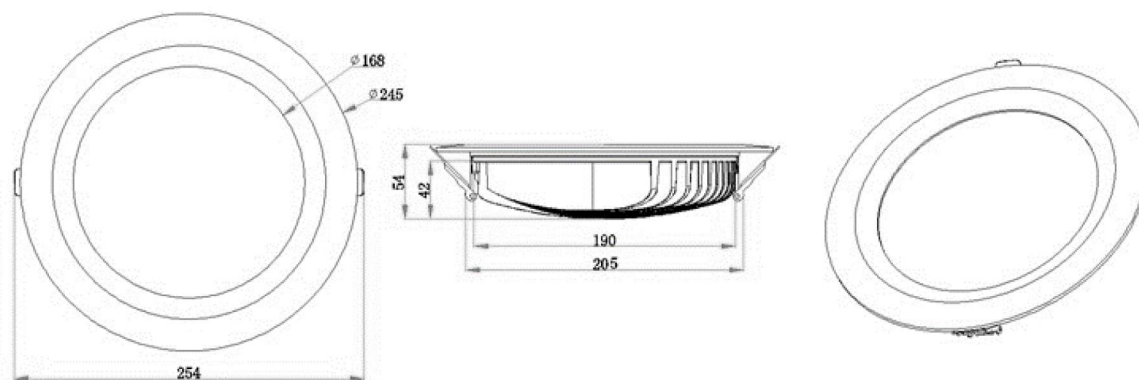

VER-D165:

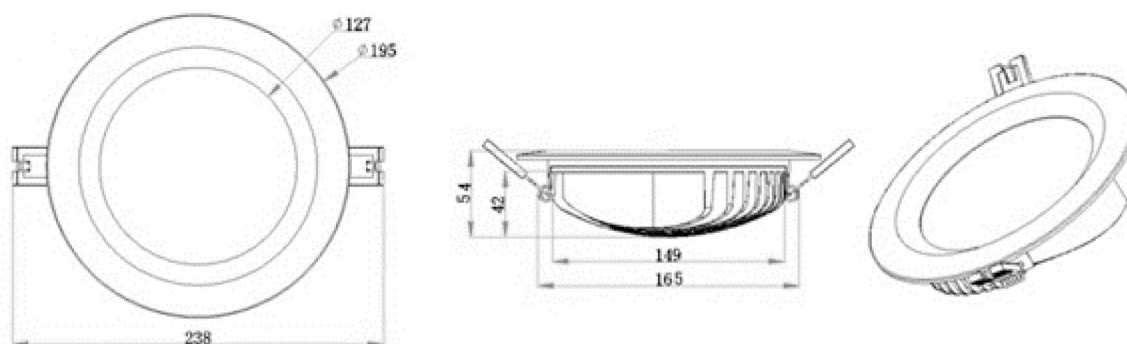

VER-D125:

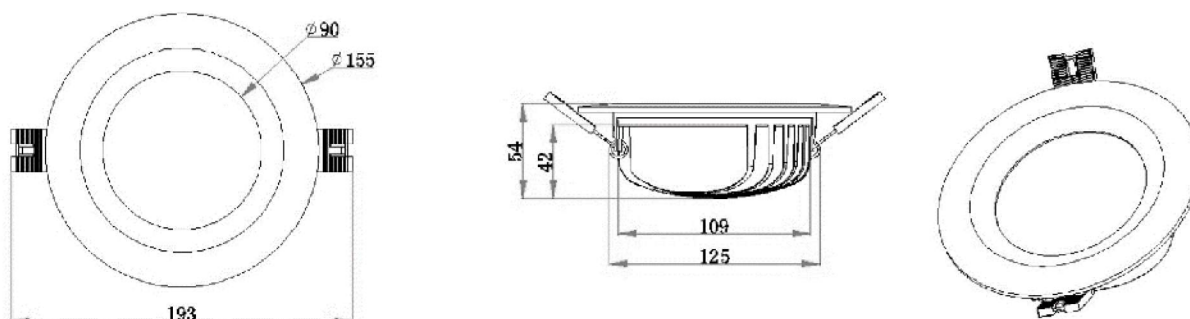

VERDE LED HQ

VERDE House,
Wellington Road
Cork,
Ireland

T. + 353 - 21 - 486 - 1577
F. + 353 - 21 - 486 - 1572
E. info@verdeled.com

